


# Horizontal Sliding Window

## Hz Configurations

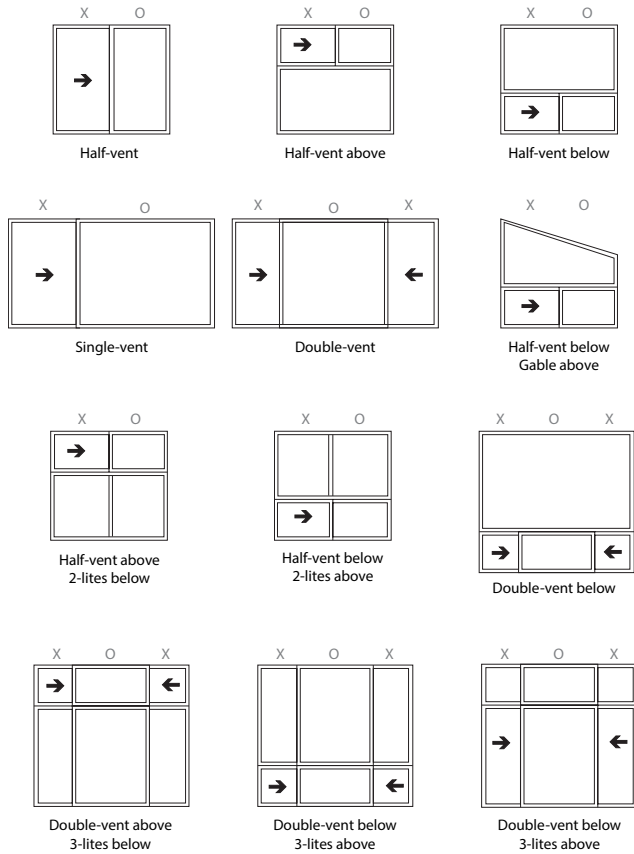

## Hz Minimum/Maximum Sizes

### HALF-VENT

- Min 2<sup>0</sup>1<sup>6</sup> Max 6<sup>0</sup>6<sup>0</sup>

### HALF-VENT ABOVE

- Min 2<sup>0</sup>3<sup>0</sup> Max 6<sup>0</sup>6<sup>0</sup>

### HALF-VENT BELOW

- Min 2<sup>0</sup>3<sup>0</sup> Max 6<sup>0</sup>6<sup>0</sup>

### DOUBLE-VENT

- Min 3<sup>0</sup>1<sup>6</sup> Max 12<sup>0</sup>6<sup>0</sup>

### DOUBLE-VENT BELOW

- Min 4<sup>0</sup>3<sup>0</sup> Max 8<sup>0</sup>6<sup>0</sup>

### DOUBLE-VENT ABOVE

- Min 4<sup>0</sup>3<sup>0</sup> Max 8<sup>0</sup>6<sup>0</sup>

Minimum egress for half-vent is 4<sup>0</sup>4<sup>0</sup>

Minimum egress for double-vent is 8<sup>0</sup>4<sup>0</sup> with a 24" vent.

## Hz Available Frame Styles

### NO NAIL-ON FIN:

8120T Block Frame

8170T 1-5/8" Narrow Z-Bar (Tuscany only)

8140T 2-1/8" Wide Z-Bar (Tuscany only)

### INCLUDES NAIL-ON FIN:

8120T 1-3/8" Nail Fin Setback

8130T 1" Nail Fin Setback with Stucco Key

8140T 1-3/8" Nail Fin Setback, 2" Long Nail Fin

8140T 1-3/8" Nail Fin Setback, 2" Long Nail Fin with optional:

- 3/4" Flat J-channel
- 1" Contoured J-channel
- 2" Brickmold-style J-channel
- Welded Brickmold

*NOTE: For engineering approval contact your Milgard representative for any configuration over 40 square feet. Each Milgard Manufacturing plant reserves the right to alter or change sizes and configurations according to location capabilities. Ask your Milgard rep about specialty applications. Windows over 40 square feet shipped open for field glazing. Varies by location.*

*Not all frame styles available at all Milgard locations. Contact your Milgard Representative for more information.*